



## Technical data 500260

<i>Material</i>	100 % polyester spunbond, white,
<i>Grammage</i>	260 g/m <sup>2</sup>
<i>Thickness</i>	0,70 mm
<i>Max. tensile strength</i>	350 N/5 cm
<i>Elongation at max. strength</i>	30 %
<i>Air permeability</i>	180 l/m <sup>2</sup> sec (200 Pa)
<i>Max. temperature</i>	140° C.
<i>Certificate IFA</i>	M – (DIN EN 60335-2-69:2008)

### INITIAL EFFICIENTY

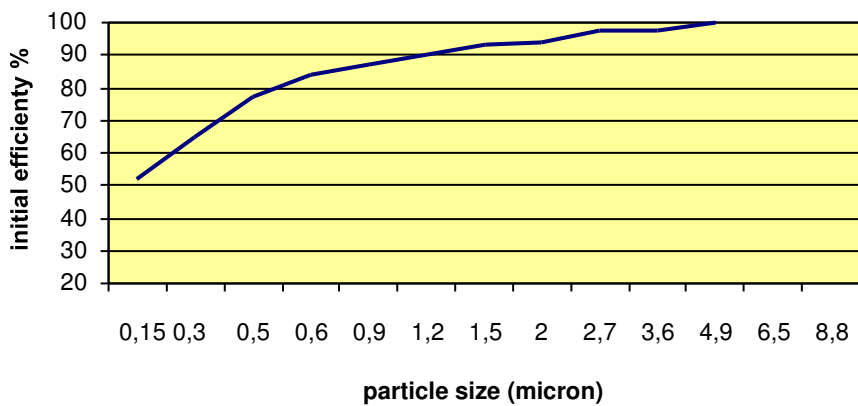

### PRESSURE TEST

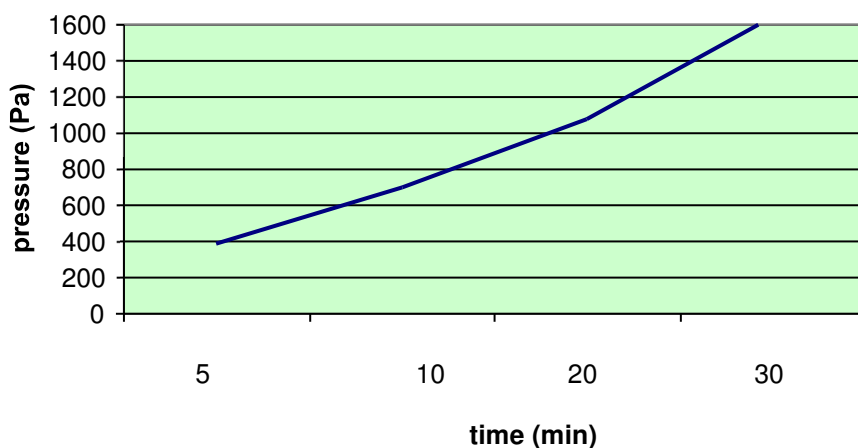

Contaminant	ISO Fine (200 mg/m <sup>3</sup> )
Air flow	200 m <sup>3</sup> /m <sup>2</sup> x h
Face velocity	0,056 m/sec
Test Area	100 cm <sup>2</sup>

For information only, do not constitute specification