


PERFORMANCE DIAGRAM

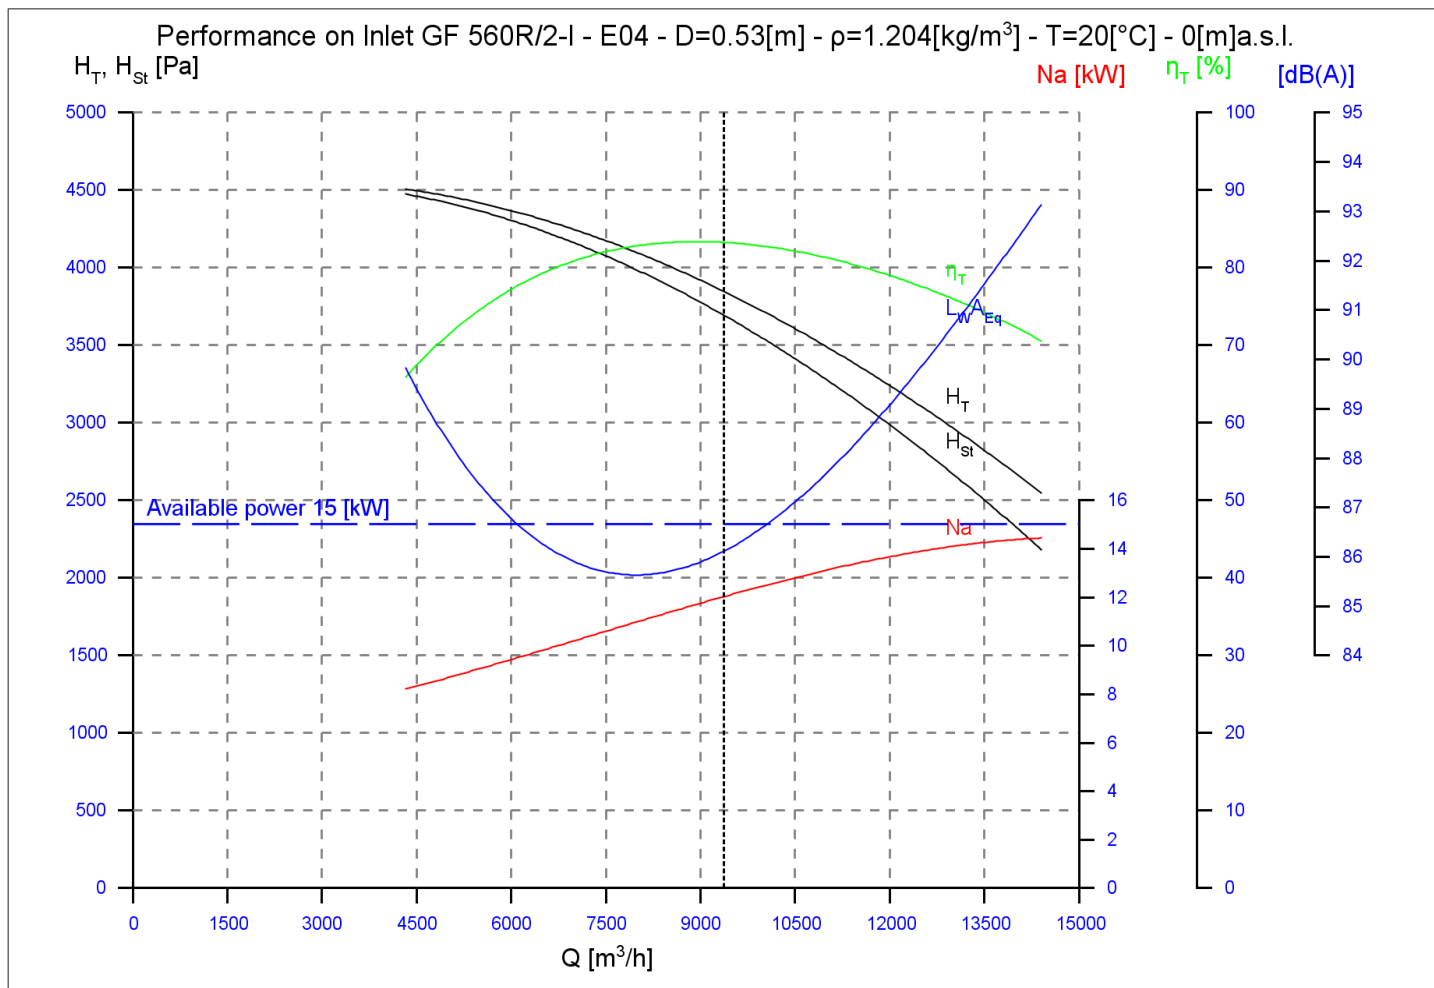

GF 560R/2-I	$\rho = 1.204[\text{kg/m}^3]$ at 20[°C], 0[m]a.s.l.	$\rho = 1.204[\text{kg/m}^3]$ at 20[°C], 0[m]a.s.l.	Warning	
	Q [m³/h]	9360		
	NQ [Nm³/h]	8721		
	H _T [Pa]	3847		3847
	H _{St} [Pa]	3693		3693
	Na [kW]	12.016		12.016
	Ne [kW]	12.016		12.016
	η_T [%]	83.24		
	L _W A _{Eq} [dB(A)]	86.1		86.1
	LA _{Eq} [dB(A)]	72.8		

RPM []	2960	Rpm limits []	<=60 °C: 3300
Frequency [Hz]	50	Execution	E04
Φ Impeller [mm]	530	Class	I

Measured in a free field and 1.5 [m] for away from the blower enveloping surface according to ISO3744. Tolerance ±3 [dB(A)]