


PERFORMANCE DIAGRAM

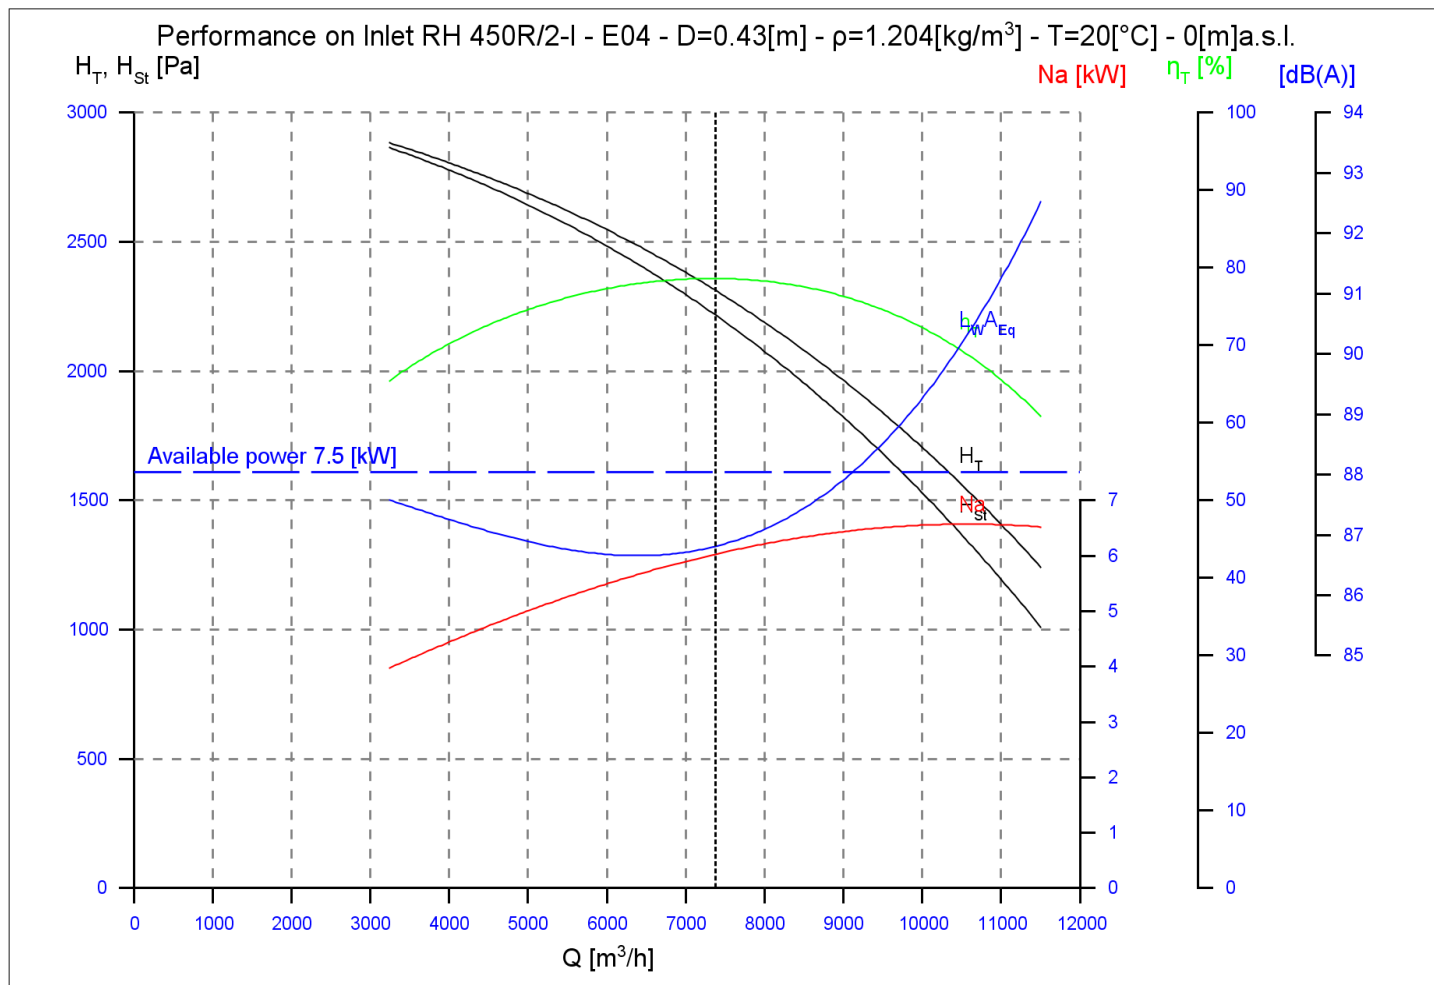

RH 450R/2-I	$\rho = 1.204[\text{kg/m}^3]$ at 20[°C], 0[m]a.s.l.	$\rho = 1.204[\text{kg/m}^3]$ at 20[°C], 0[m]a.s.l.	Warning
	Q [m³/h]	7370	
NQ [Nm³/h]	6867		
H _T [Pa]	2312	2312	
H _{St} [Pa]	2216	2216	
Na [kW]	6.023	6.023	
Ne [kW]	6.023	6.023	
η_T [%]	78.58		
L _{WA_Eq} [dB(A)]	86.8	86.8	
LA _{Eq} [dB(A)]	73.5		

RPM []	2950	Rpm limits []	<=60 °C: 3150
Frequency [Hz]	50	Execution	E04
Φ Impeller [mm]	430	Class	I

Measured in a free field and 1.5 [m] for away from the blower enveloping surface according to ISO3744. Tolerance ±3 [dB(A)]