


PERFORMANCE DIAGRAM

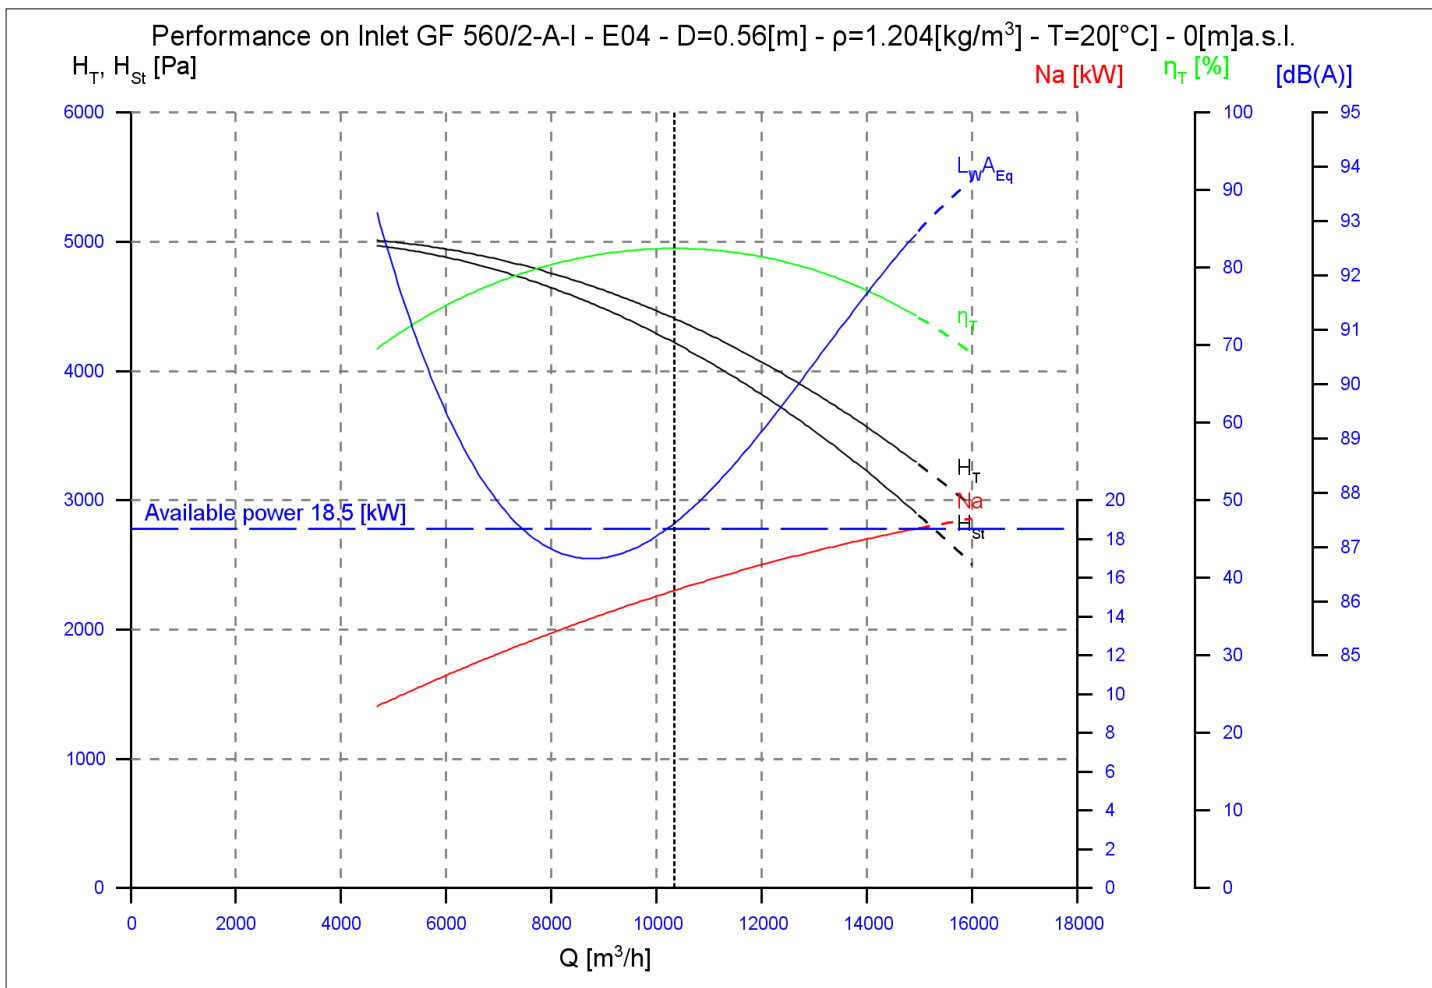

GF 560/2-A-I	$\rho = 1.204[\text{kg/m}^3]$	$\rho = 1.204[\text{kg/m}^3]$	Warning
	at $20[^\circ\text{C}]$, $0[\text{m}]$ a.s.l.		
Q [m^3/h]	10340		
NQ [Nm^3/h]	9635		
H_T [Pa]	4404	4404	
H_{St} [Pa]	4216	4216	
Na [kW]	15.341	15.341	
Ne [kW]	15.341	15.341	
η_T [%]	82.45		
$L_{WA_{Eq}}$ [dB(A)]	87.43	87.43	
LA_{Eq} [dB(A)]	74.13		

RPM []	2960	Rpm limits []	≤ 60 °C: 3200
Frequency [Hz]	50	Execution	E04
Φ Impeller [mm]	560	Class	I

Measured in a free field and 1.5 [m] for away from the blower enveloping surface according to ISO3744. Tolerance ± 3 [dB(A)]