


PERFORMANCE DIAGRAM

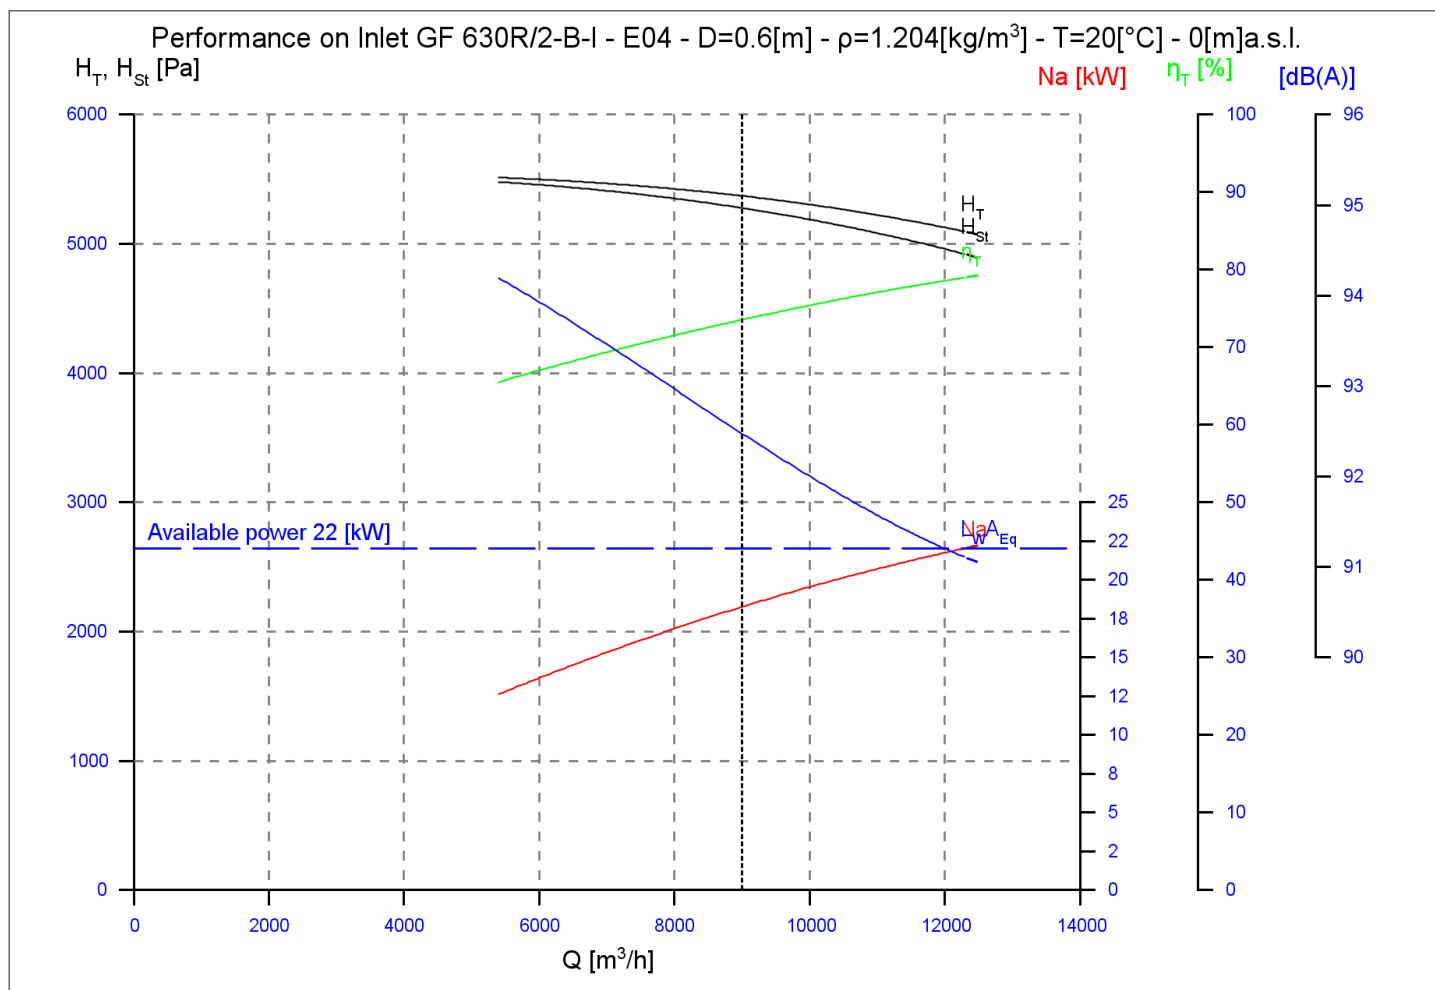

GF 630R/2-B-I	$\rho = 1.204[\text{kg/m}^3]$ at $20[^\circ\text{C}]$, 0[m]a.s.l.	$\rho = 1.204[\text{kg/m}^3]$ at $20[^\circ\text{C}]$, 0[m]a.s.l.
Q [m ³ /h]	9000	
NQ [Nm ³ /h]	8386	
H _T [Pa]	5369	5369
H _{St} [Pa]	5275	5275
Na [kW]	18.255	18.255
Ne [kW]	18.255	18.255
η_T [%]	73.52	
L _W A _{Eq} [dB(A)]	92.47	92.47
LA _{Eq} [dB(A)]	79.17	

Warning	

RPM []	2955	Rpm limits []	<=60 °C: 3100
Frequency [Hz]	50	Execution	E04
Φ Impeller [mm]	600	Class	I

Measured in a free field and 1.5 [m] for away from the blower enveloping surface according to ISO3744. Tolerance ±3 [dB(A)]