


PERFORMANCE DIAGRAM

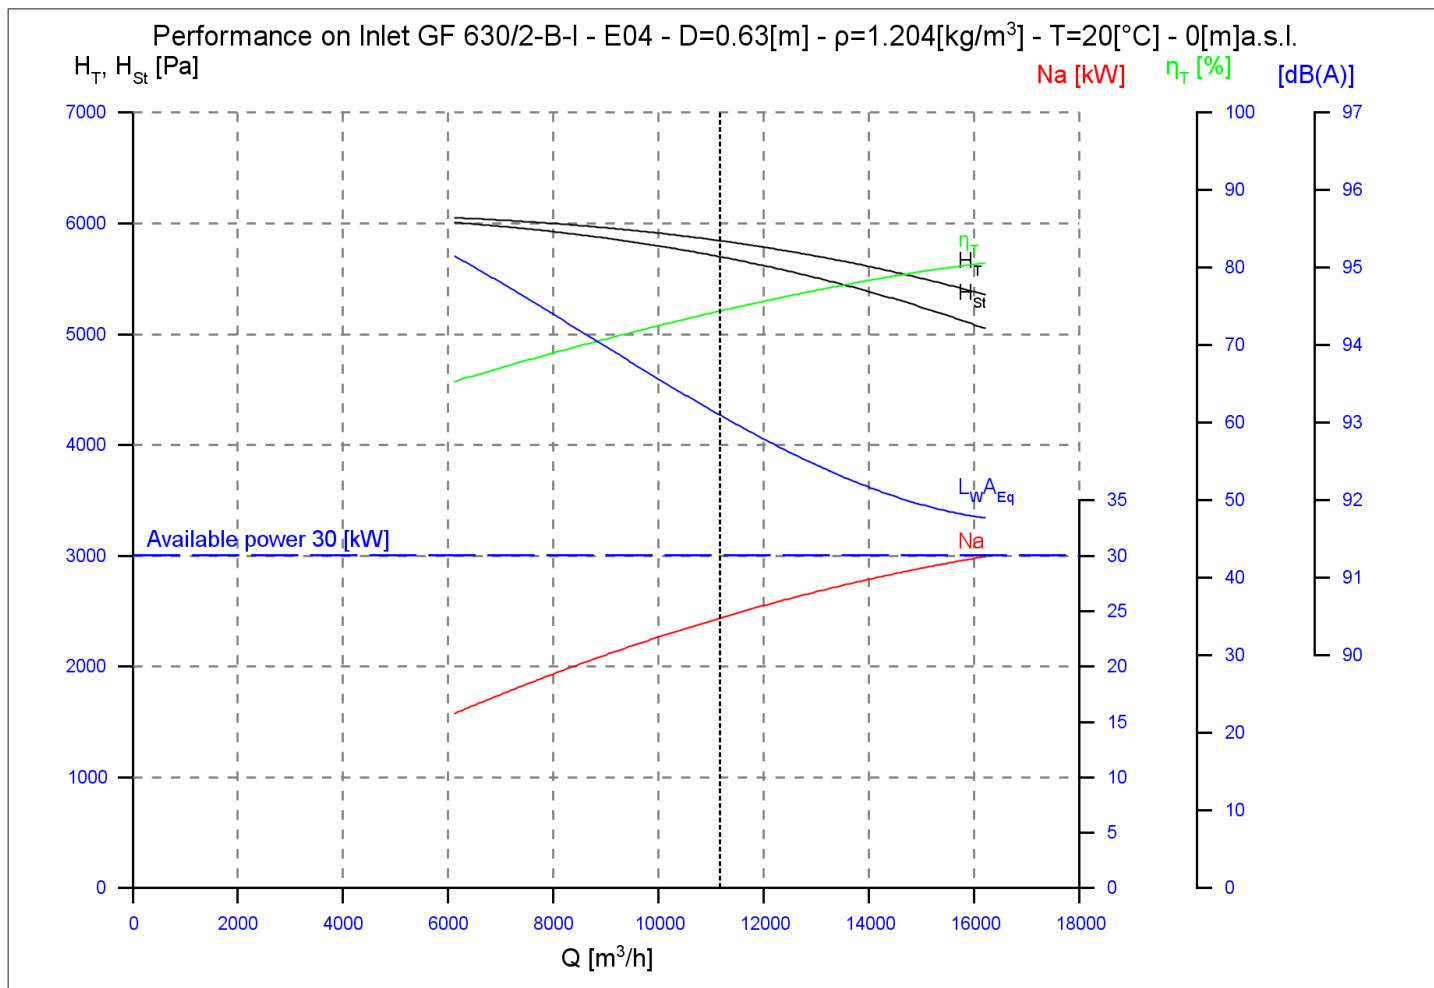

GF 630/2-B-I	$\rho = 1.204[\text{kg/m}^3]$ at $20[^\circ\text{C}]$, $0[\text{m}]$ a.s.l.	$\rho = 1.204[\text{kg/m}^3]$ at $20[^\circ\text{C}]$, $0[\text{m}]$ a.s.l.	Warning	
	Q [m³/h]	11160		
	NQ [Nm³/h]	10399		
	H _T [Pa]	5841		5841
	H _{st} [Pa]	5697		5697
	Na [kW]	24.35		24.35
	Ne [kW]	24.35		24.35
	η _T [%]	74.37		
	L _{WA,Eq} [dB(A)]	93.1		93.1
	LA _{Eq} [dB(A)]	79.8		

RPM []	2955	Rpm limits []	<=60 °C: 3000
Frequency [Hz]	50	Execution	E04
Φ Impeller [mm]	630	Class	I

Measured in a free field and 1.5 [m] for away from the blower enveloping surface according to ISO3744. Tolerance ±3 [dB(A)]