


PERFORMANCE DIAGRAM

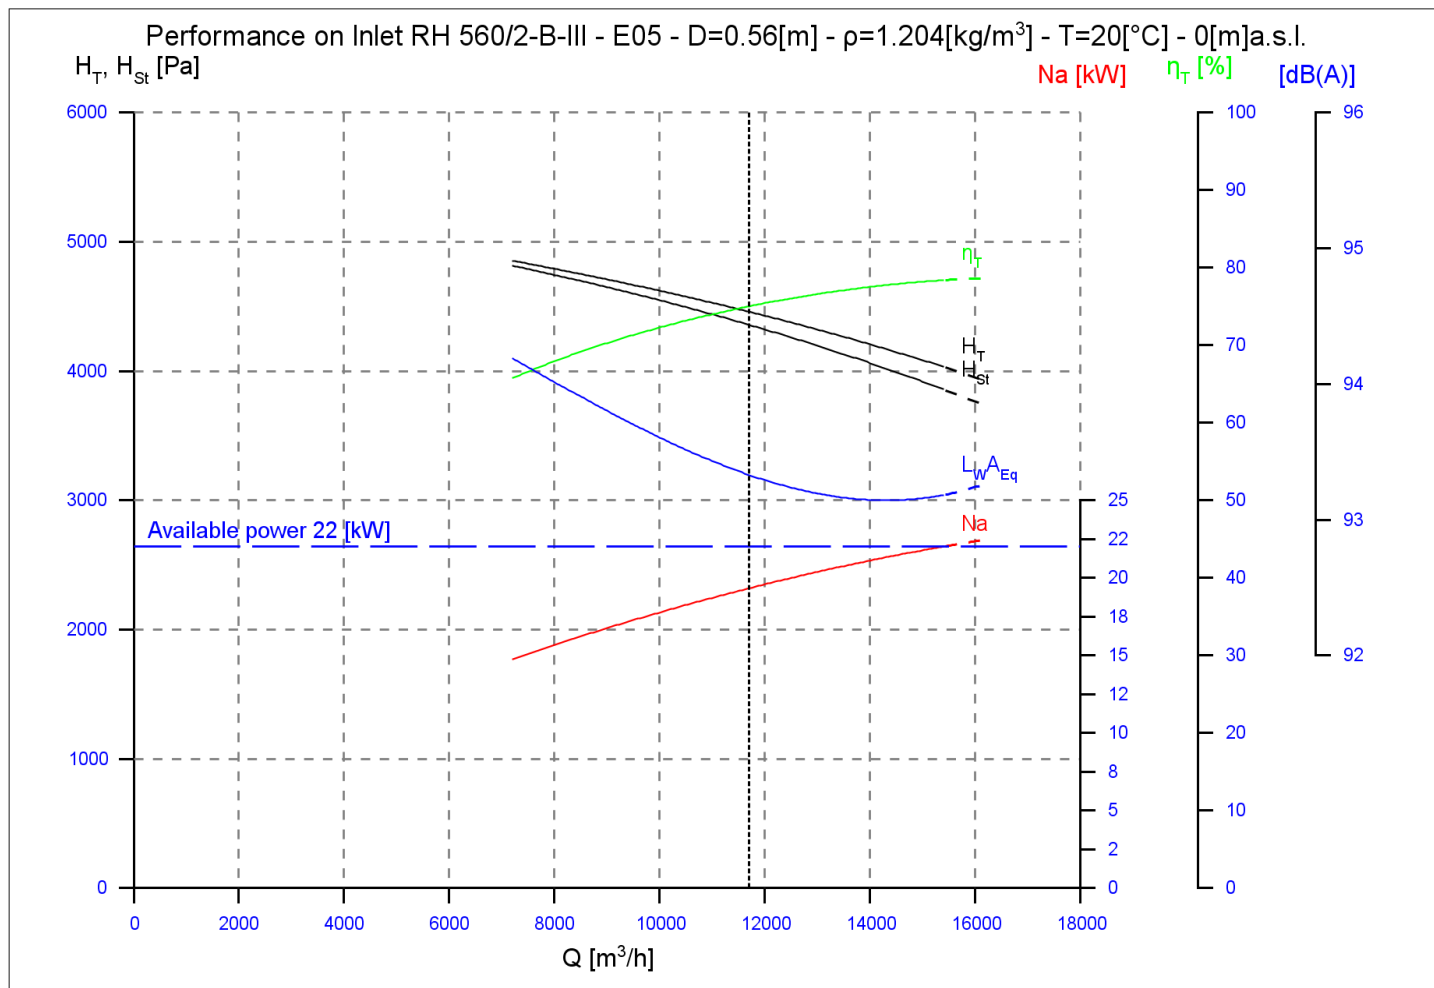

RH 560/2-B-III	$\rho = 1.204[\text{kg/m}^3]$ at 20[°C], 0[m]a.s.l.	$\rho = 1.204[\text{kg/m}^3]$ at 20[°C], 0[m]a.s.l.	Warning	
	Q [m³/h]	11700		
	NQ [Nm³/h]	10902		
	H _T [Pa]	4457		4457
	H _{St} [Pa]	4356		4356
	Na [kW]	19.316		19.316
	Ne [kW]	19.316		19.316
	η _T [%]	74.99		
	L _W A _{Eq} [dB(A)]	93.33		93.33
	LA _{Eq} [dB(A)]	80.03		

RPM []	2955	Rpm limits []	<=60 °C: 3400
Frequency [Hz]	50	Execution	E05
Φ Impeller [mm]	560	Class	III

Measured in a free field and 1.5 [m] for away from the blower enveloping surface according to ISO3744. Tolerance ±3 [dB(A)]