


PERFORMANCE DIAGRAM

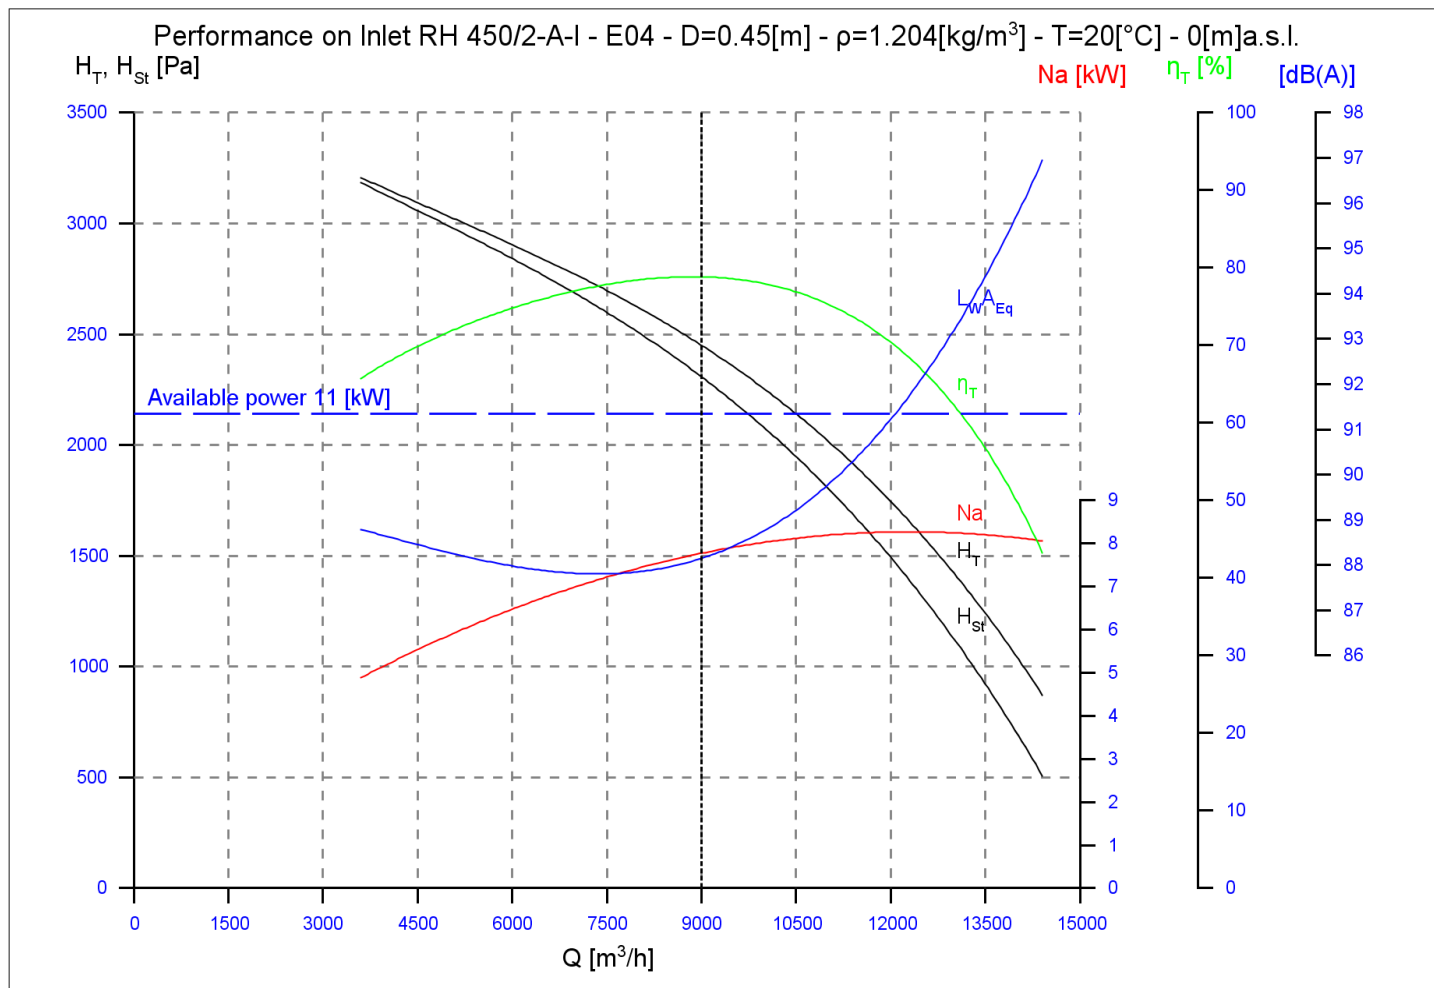

RH 450/2-A-I	$\rho = 1.204[\text{kg/m}^3]$ at 20[°C], 0[m]a.s.l.	$\rho = 1.204[\text{kg/m}^3]$ at 20[°C], 0[m]a.s.l.
Q [m³/h]	9000	
NQ [Nm³/h]	8386	
H _T [Pa]	2448	2448
H _{St} [Pa]	2305	2305
Na [kW]	7.767	7.767
Ne [kW]	7.767	7.767
η _T [%]	78.79	
L _{WA} [dB(A)]	88.14	88.14
LA _{Eq} [dB(A)]	74.84	

Warning	

RPM []	2955	Rpm limits []	<=60 °C: 3050
Frequency [Hz]	50	Execution	E04
Φ Impeller [mm]	450	Class	I

Measured in a free field and 1.5 [m] for away from the blower enveloping surface according to ISO3744. Tolerance ±3 [dB(A)]