

TECHNICAL DATA SHEET

PRODUCT

Bulkhead Fitting
JSXFN Series



HOW TO ORDER

JSXFN - D - 06 - B - X12

(1) (2) (3)

(1) PIPING

(D) DOUBLE



(2) PORT SIZE

06

10

14

(3) FLUID AND AMBIENT
TEMPERATURES

(B) -40 to 60 °C

TECHNICAL SPECIFICATIONS

PORT SIZE		3/4" (20A)	1" (25A)	1 1/2" (40A)
MAX OPERATING PRESSURE (MPa)		0.9		
WITHSTAND PRESSURE (MPa)		1.5		
AMBIENT TEMPERATURE (°C)		-40*1 to 60		
MAX PLATE THICKNESS (MM)		8		
MOUNTING HOLE DIAMETER (MM)		42 to 51	54 to 62	69 to 78
WEIGHT (g)	DOUBLE	400	650	940
	SINGLE	260	450	640

*1 No condensation

Be sure to read "Specific Product Precautions" before handling

Iperjet S.r.l.

Via Roma, 86
38012 Fraz. Taio - Predaia
Trento - (Italy)


Tel. +39 0463 461049
www.iperjet.com
info@iperjet.com - iperjet@pec.it

Cap Soc € 10.000 i.v
R.E.A TN 233045
P. I. - Cod Fis - Reg Imp Trento IT
02553340221

Filter Cleaning Solutions

COMPONENTS LIST

No.	DESCRIPTION	MATERIAL
1	Bulkhead fitting	ADC
2	Bulkhead nut	ADC
3	Gasket	Aramid, etc.
4	Compression nut	ADC
5	Seal	NBR
6	Washer	Steel

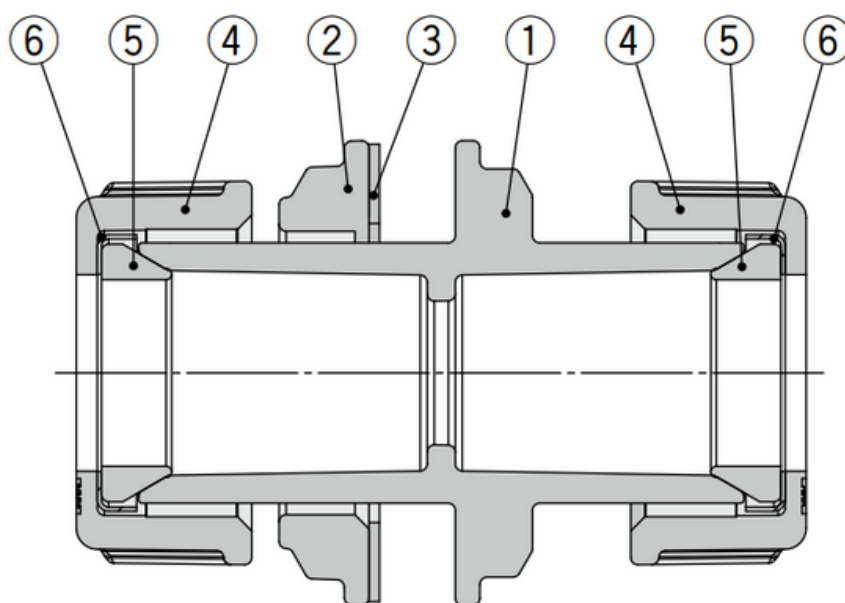


DOUBLE

LAYOUT DIMENSIONS

Model	Port size	A	∅ B	C
JSXFN-D06-B-X12	3/4	54	66	104
JSXFN-D10-B-X12	1	65	79	112
JSXFN-D14-B-X12	1 1/2	80	93	122.6

*The C dimensions show the dimensions after tightening.

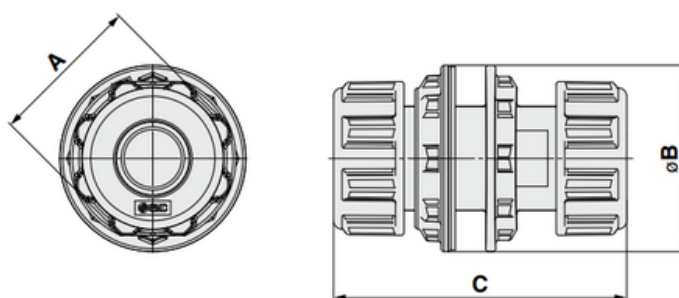

DOUBLE

INSTALLATION DIMENSIONS

Model	Pipe dia. ∅ A	Mounting hole dia. ∅ B	Max plate thickness C	Min. spacing D	Pipe screw-in depth E
JSXFN-D06-B-X12	3/4"	42 to 51	8	30	50
JSXFN-D10-B-X12	1"	54 to 62		40	53.5
JSXFN-D14-B-X12	1 1/2"	69 to 78		46	59.2

Double

