


DIAGRAMMA PRESTAZIONI

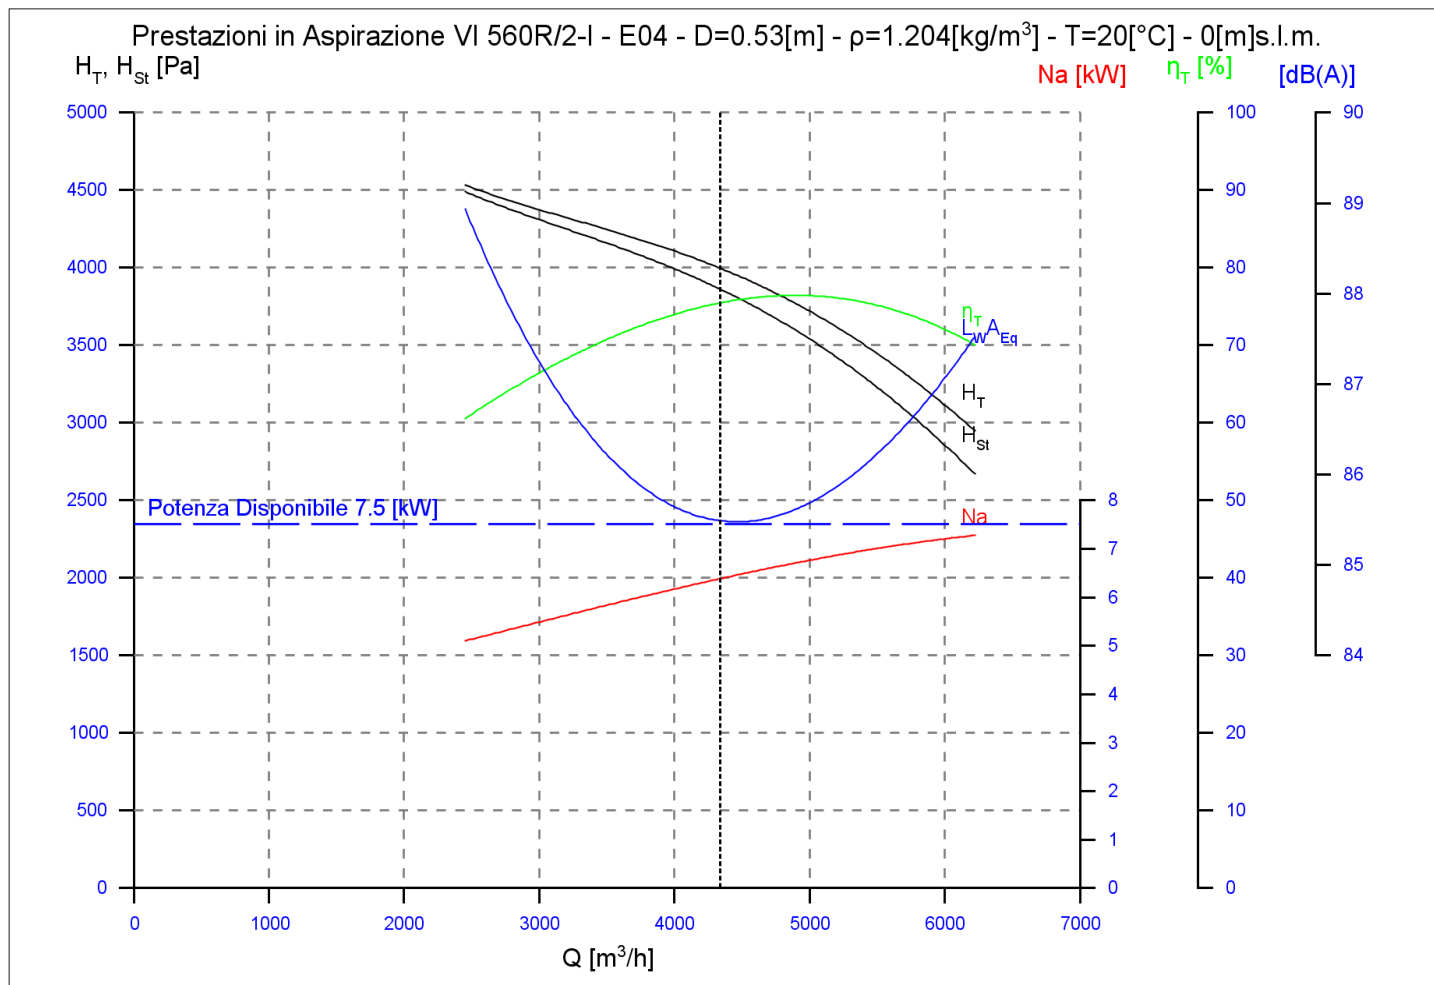

VI 560R/2-I	$\rho = 1.204[\text{kg/m}^3]$ a 20[°C], 0[m]s.l.m.	$\rho = 1.204[\text{kg/m}^3]$ a 20[°C], 0[m]s.l.m.	Warning
Q [m³/h]	4335		
NQ [Nm³/h]	4039		
H_T [Pa]	3995	3995	
H_{St} [Pa]	3860	3860	
Na [kW]	6.379	6.379	
Ne [kW]	6.379	6.379	
η_T [%]	75.43		
$L_{WA,Eq}$ [dB(A)]	85.49	85.49	
LA_{Eq} [dB(A)]	72.19		

RPM []	2950	Limiti RPM []	<=60 °C: 4250
Frequenza [Hz]	50	Esecuzione	E04
Φ Girante [mm]	530	Classe	I

Misurato in campo libero e 1.5 [m] distanza dalla chiocciola del ventilatore in accordo con ISO3744. Tolleranza ± 3 [dB(A)]