


## DIAGRAMMA PRESTAZIONI

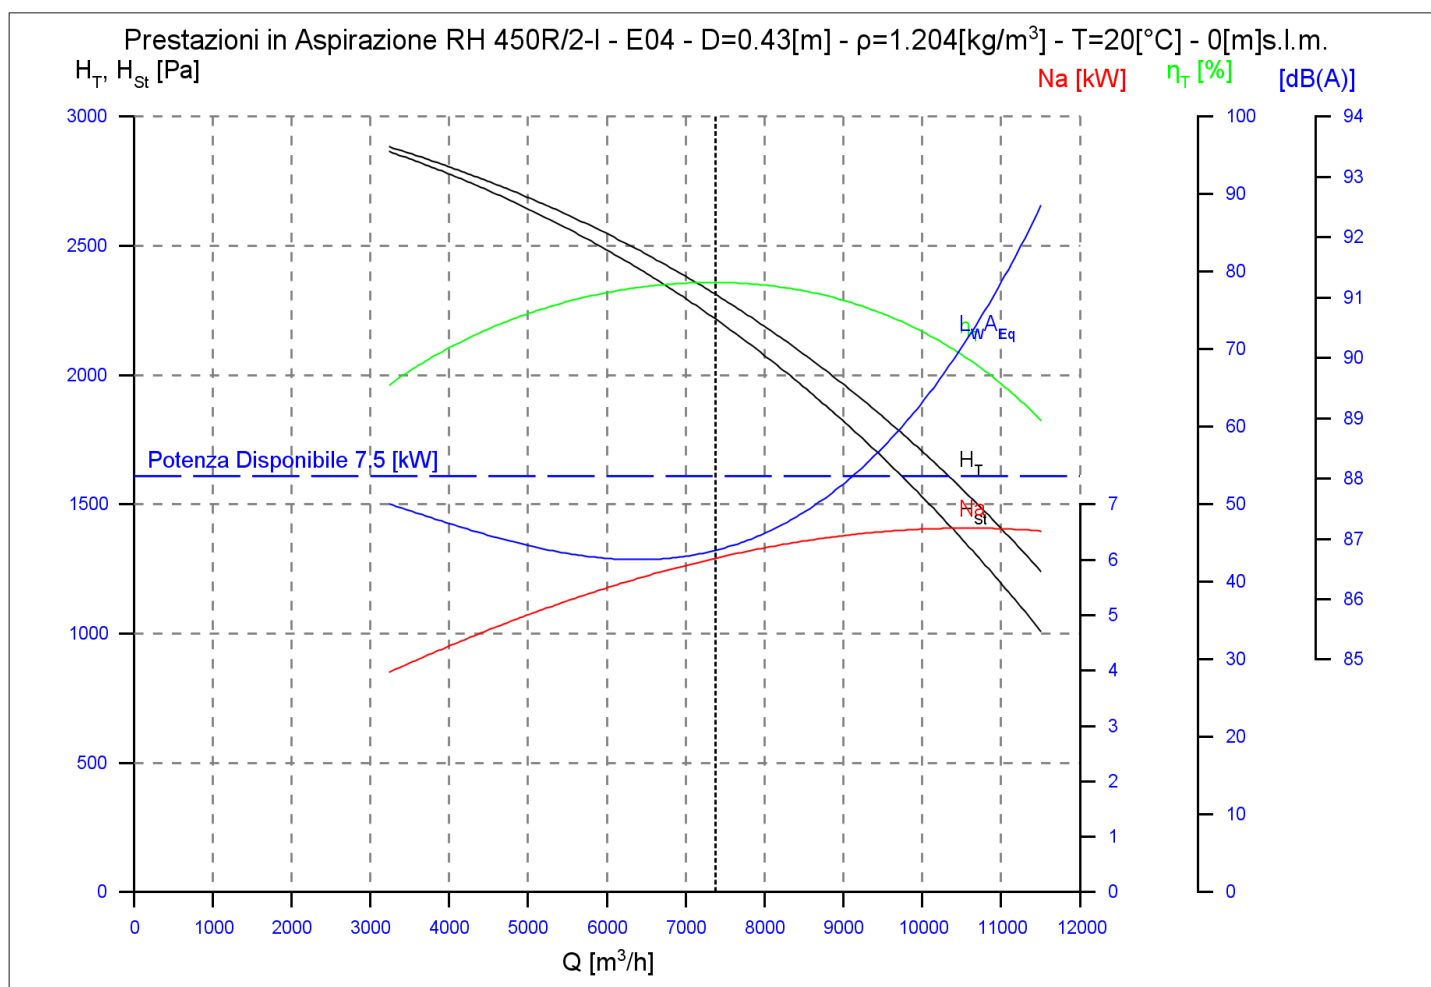

<b>RH 450R/2-I</b>	$\rho = 1.204[\text{kg/m}^3]$ a 20[°C], 0[m]s.l.m.	$\rho = 1.204[\text{kg/m}^3]$ a 20[°C], 0[m]s.l.m.	<b>Warning</b>
Q [m <sup>3</sup> /h]	7370		
NQ [Nm <sup>3</sup> /h]	6867		
H <sub>T</sub> [Pa]	2312	2312	
H <sub>St</sub> [Pa]	2216	2216	
Na [kW]	6.023	6.023	
Ne [kW]	6.023	6.023	
$\eta_T$ [%]	78.58		
L <sub>W</sub> A <sub>Eq</sub> [dB(A)]	86.8	86.8	
LA <sub>Eq</sub> [dB(A)]	73.5		

RPM [ ]	2950	Limiti RPM [ ]	≤60 °C: 3150
Frequenza [Hz]	50	Esecuzione	E04
Φ Girante [mm]	430	Classe	I

Misurato in campo libero e 1.5 [m] distanza dalla chiocciola del ventilatore in accordo con ISO3744. Tolleranza ±3 [dB(A)]