


DIAGRAMMA PRESTAZIONI

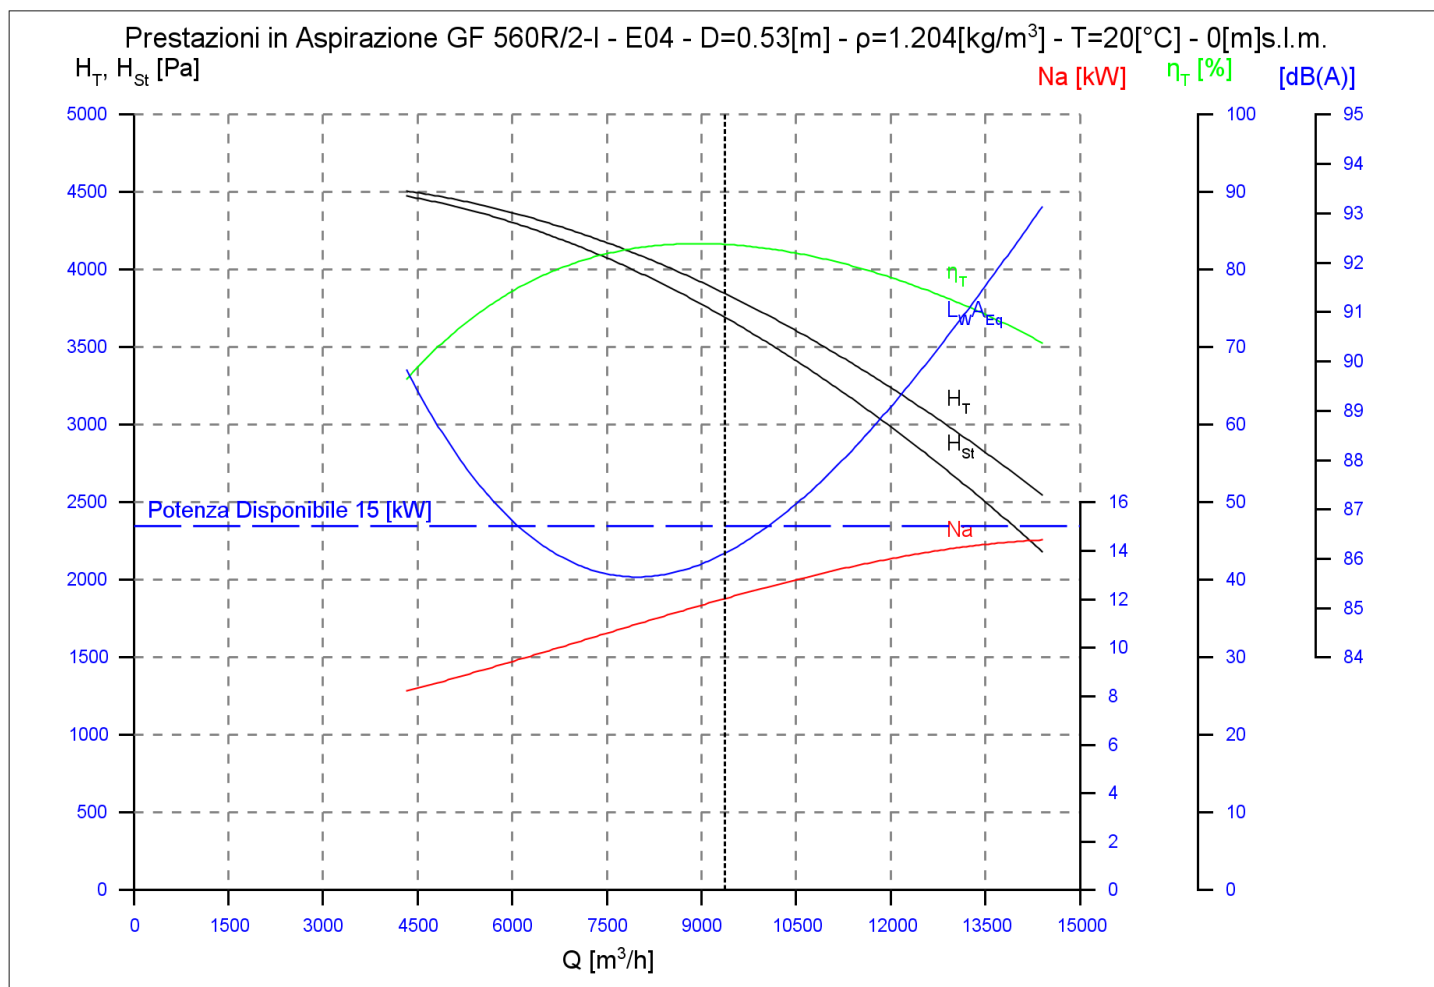

GF 560R/2-I	$\rho = 1.204[\text{kg/m}^3]$ a 20[°C], 0[m]s.l.m.	$\rho = 1.204[\text{kg/m}^3]$ a 20[°C], 0[m]s.l.m.	Warning
Q [m ³ /h]	9360		
NQ [Nm ³ /h]	8721		
H_T [Pa]	3847	3847	
H_{St} [Pa]	3693	3693	
Na [kW]	12.016	12.016	
Ne [kW]	12.016	12.016	
η_T [%]	83.24		
$L_{W, A_{Eq}}$ [dB(A)]	86.1	86.1	
LA_{Eq} [dB(A)]	72.8		

RPM []	2960	Limiti RPM []	<=60 °C: 3300
Frequenza [Hz]	50	Esecuzione	E04
Φ Girante [mm]	530	Classe	I

Misurato in campo libero e 1.5 [m] distanza dalla chiocciola del ventilatore in accordo con ISO3744. Tolleranza ± 3 [dB(A)]