


DIAGRAMMA PRESTAZIONI

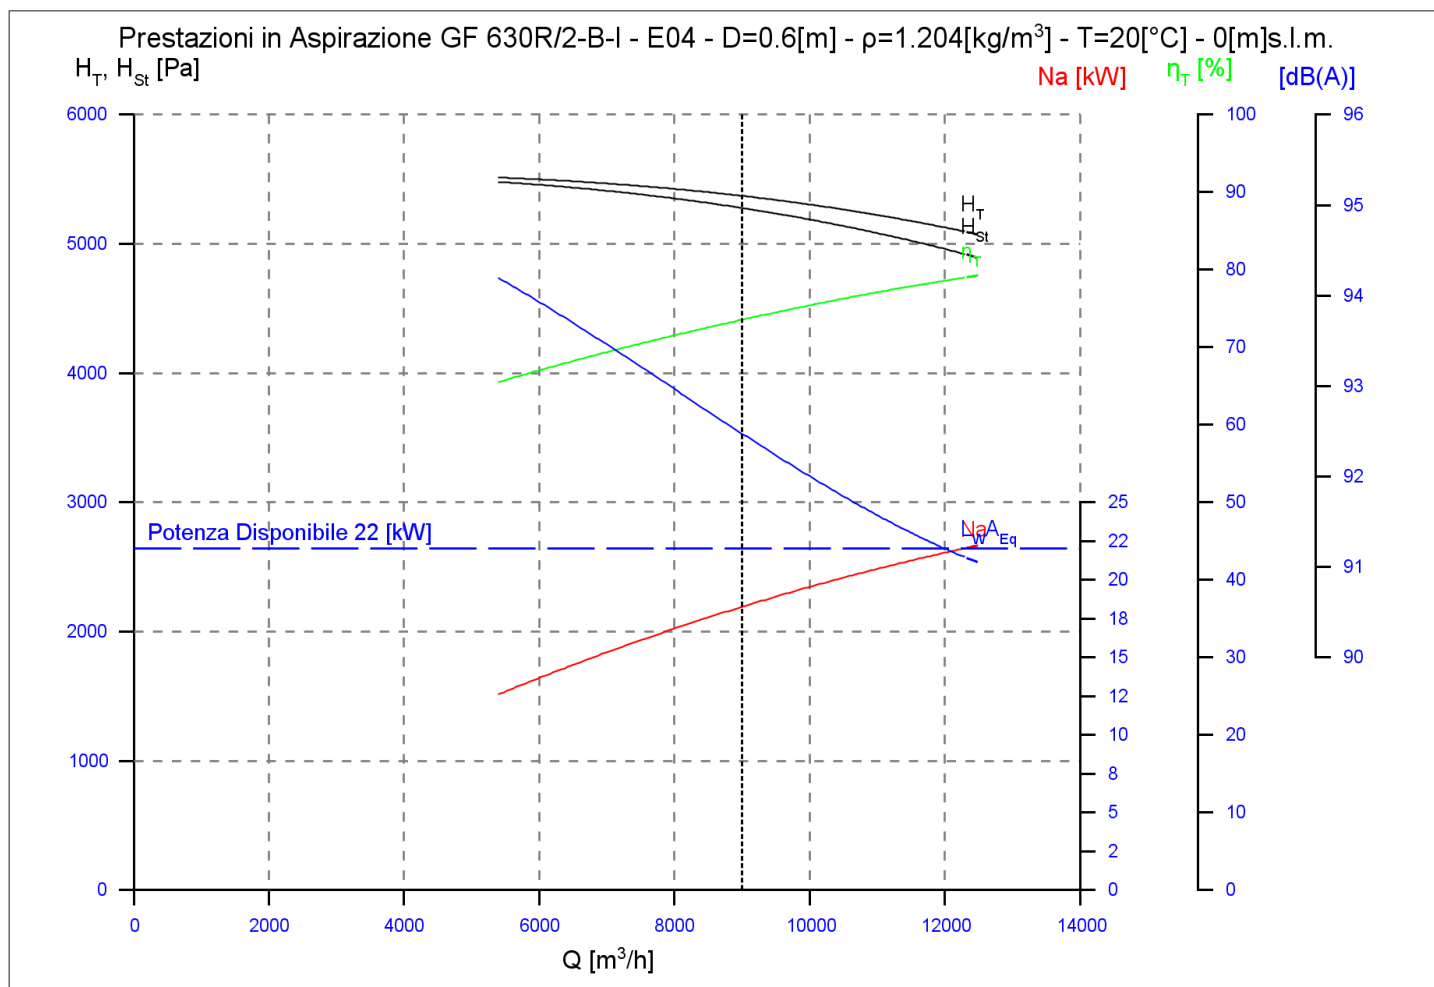

GF 630R/2-B-I	$\rho = 1.204[\text{kg/m}^3]$ a 20[°C], 0[m]s.l.m.	$\rho = 1.204[\text{kg/m}^3]$ a 20[°C], 0[m]s.l.m.	Warning
Q [m ³ /h]	9000		
NQ [Nm ³ /h]	8386		
H_T [Pa]	5369	5369	
H_{St} [Pa]	5275	5275	
Na [kW]	18.255	18.255	
Ne [kW]	18.255	18.255	
η_T [%]	73.52		
$L_{WA_{Eq}}$ [dB(A)]	92.47	92.47	
LA_{Eq} [dB(A)]	79.17		

RPM []	2955	Limiti RPM []	≤60 °C: 3100
Frequenza [Hz]	50	Esecuzione	E04
Φ Girante [mm]	600	Classe	I

Misurato in campo libero e 1.5 [m] distanza dalla chiocciola del ventilatore in accordo con ISO3744. Tolleranza ±3 [dB(A)]