


DIAGRAMMA PRESTAZIONI

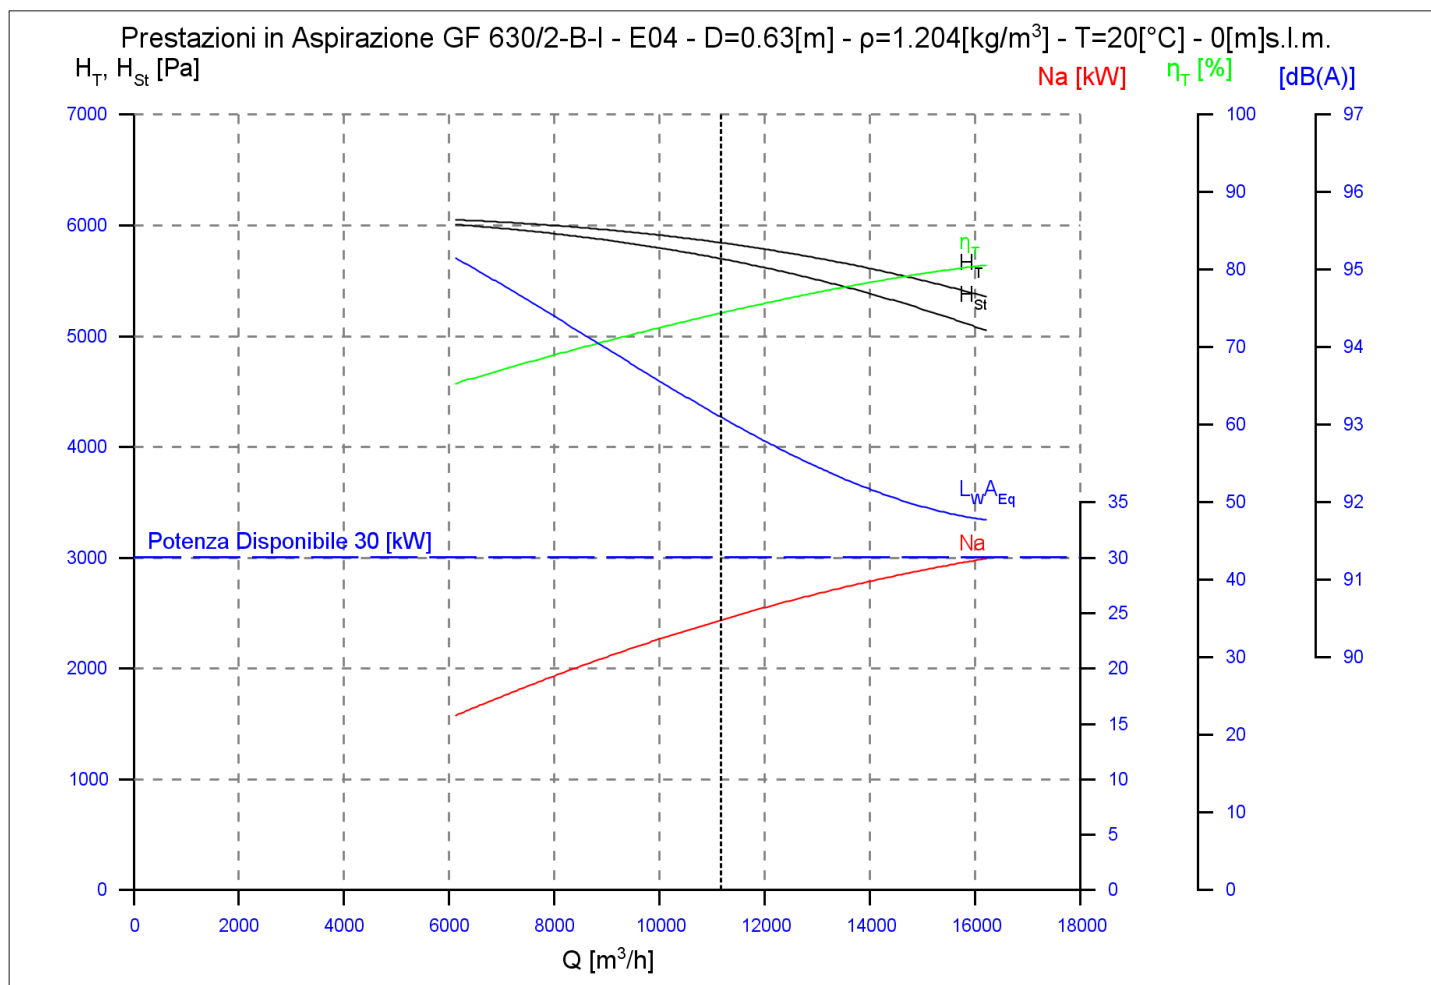

GF 630/2-B-I	$\rho = 1.204[\text{kg/m}^3]$ a 20[°C], 0[m]s.l.m.	$\rho = 1.204[\text{kg/m}^3]$ a 20[°C], 0[m]s.l.m.	Warning
Q [m ³ /h]	11160		
NQ [Nm ³ /h]	10399		
H _T [Pa]	5841	5841	
H _{St} [Pa]	5697	5697	
Na [kW]	24.35	24.35	
Ne [kW]	24.35	24.35	
η _T [%]	74.37		
L _W A _{Eq} [dB(A)]	93.1	93.1	
LA _{Eq} [dB(A)]	79.8		

RPM []	2955	Limiti RPM []	≤60 °C: 3000
Frequenza [Hz]	50	Esecuzione	E04
Φ Girante [mm]	630	Classe	I

Misurato in campo libero e 1.5 [m] distanza dalla chiocciola del ventilatore in accordo con ISO3744. Tolleranza ±3 [dB(A)]