


DIAGRAMMA PRESTAZIONI

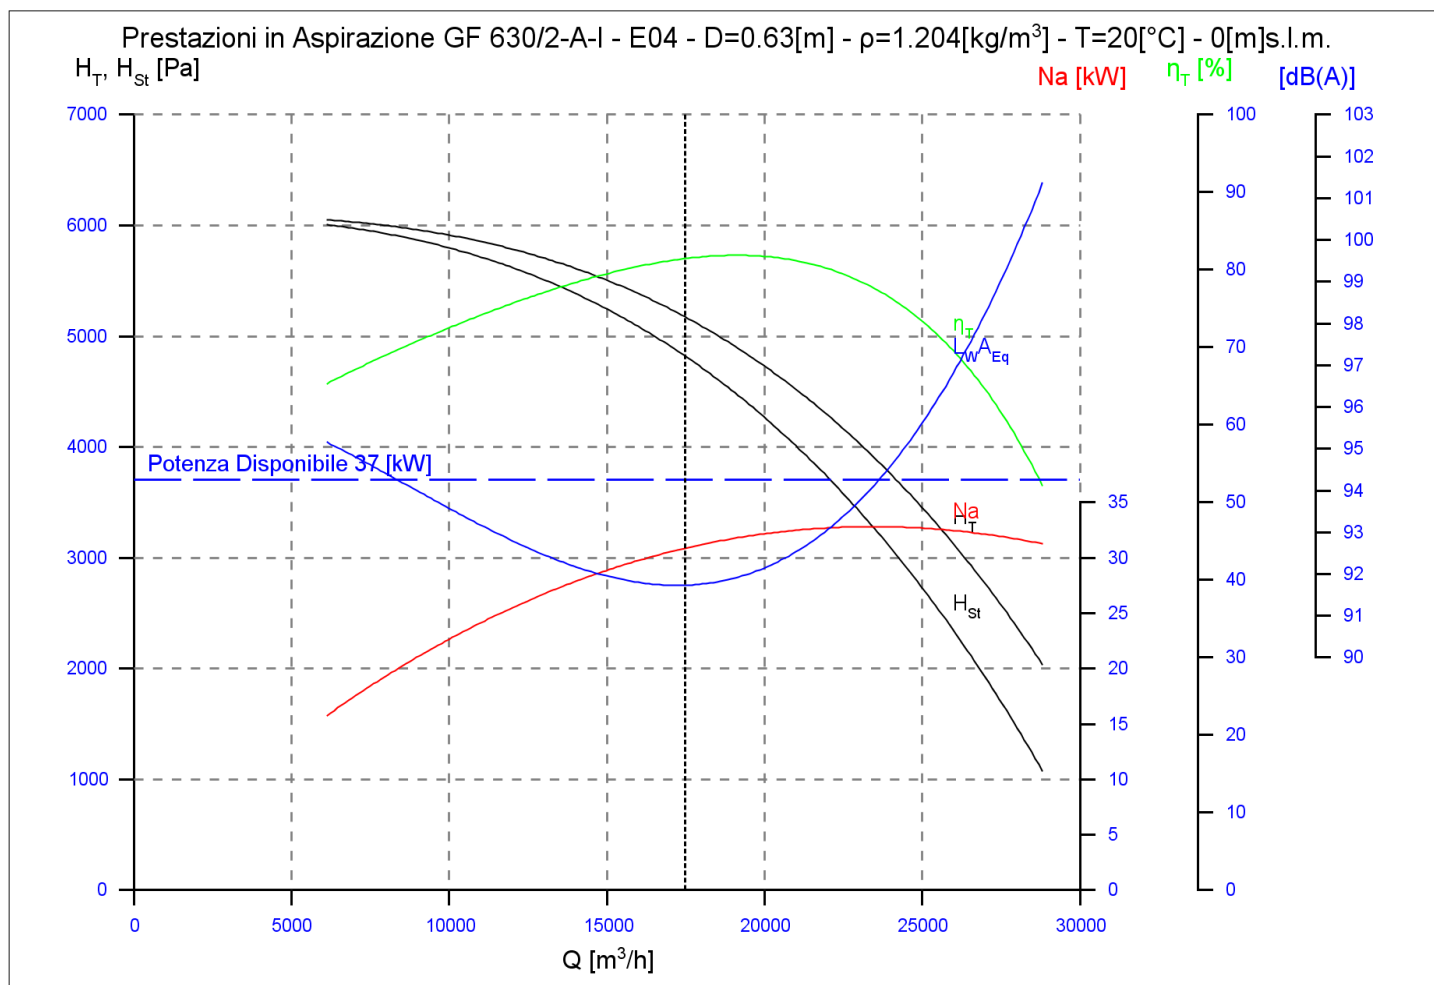

GF 630/2-A-I	$\rho = 1.204[\text{kg/m}^3]$ a 20[°C], 0[m]s.l.m.	$\rho = 1.204[\text{kg/m}^3]$ a 20[°C], 0[m]s.l.m.	Warning
Q [m ³ /h]	17460		
NQ [Nm ³ /h]	16269		
H_T [Pa]	5173	5173	
H_{St} [Pa]	4821	4821	
Na [kW]	30.827	30.827	
Ne [kW]	30.827	30.827	
η_T [%]	81.39		
$L_{WA_{Eq}}$ [dB(A)]	91.72	91.72	
LA_{Eq} [dB(A)]	78.42		

RPM []	2955	Limiti RPM []	≤60 °C: 3000
Frequenza [Hz]	50	Esecuzione	E04
Φ Girante [mm]	630	Classe	I

Misurato in campo libero e 1.5 [m] distanza dalla chiocciola del ventilatore in accordo con ISO3744. Tolleranza ±3 [dB(A)]